

# Connect+ Installation Instructions



## Unpack the System

Each component will be labeled with the location in your home



### Select a Panel Location: Tips

Find a location for the Connect+ panel with a power source and at least one network connection. Install Connect+ centrally on the main floor. Avoid mounting near air ducts, appliances, or other large metal objects. Put some space between Connect+ and the home router. Connect+ includes a 6-foot cable for this purpose.

## Set Up the Control Panel

Attach the base station to the panel.




Connect one end of the Ethernet cable to your home router.

**Disregard if using cellular communication.**



Connect the other end of the Ethernet cable to the port on Connect+.



## Connect to Power

Connect the power connector to Connect+ and thread the cable through the strain relief peg.




On an available outlet plug, unscrew faceplate screw, avoid switched outlets.



Using existing screw, attach transformer to the power outlet.



## Install Sensors

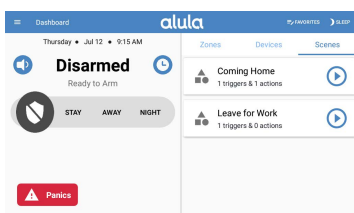

### Install Door Sensors: Tips

Before installing the door sensor, check that it will make the keypad chime when you place the magnet next to the sensor and then remove it. Verify the location of the sensor by looking for the sticker on it. Check the placement of the sensor on the door or window before mounting it to ensure it will function properly. Ensure sensor is placed on the non-hinged side of the door





The current user code is 1234. Please refer to your email for further instructions. Visit [emcsecurity.com/connect-plus-installation](http://emcsecurity.com/connect-plus-installation) for a video tutorial

# Install Door Sensors

Peel back the plastic cover on the mounting tape, remove the battery tab and install the sensor on the frame of the door.

Peel back the plastic cover on the mounting tape and place the magnet on the door so they are aligned correctly (both lines and flat sides facing each other).

Open the door and listen to make sure the Connect+ chimes to indicate the door was opened.




# Install Motion Sensors

The motion sensor will cover a 40 feet area with a 90 degree viewing angle. Avoid installing the motion detector near a heating/cooling vent or under a ceiling fan since that can increase the likelihood of a false alarm.

Attach mounting tape to either the sides or back, depending on installation style. Sides for corner mount (Blue), back for flat wall (Red).

Remove the plastic cover on the mounting tape and mount it to the wall.




# Mounting the Touchpad

For table mounting slide the feet onto the underside of the plastic enclosure. The fit is intended to be quite snug so some force may be required for the feet to “click” into place.



For wall mounting, see attached template. Template will look like image pictured on the right.

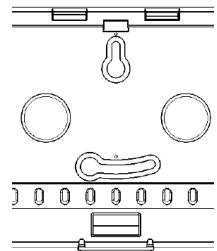

# Test/Activate the System

